




Utech Projects Pvt. Ltd.

OIL / GAS FIRED BOILER



- **Higher Thermal Efficiency of more than 90% on NCV with Heat recovery**
- **3 Pass Fully Wet Back**
- **Package Skid Mounted**
- **Fully Automatic with turndown ratio of 1:4**
- **Pressure 10.54 Kgs/cm² to 17.5 Kgs/cm². OR to suit client's requirement**

IBR OIL/GAS FIRED BOILERS

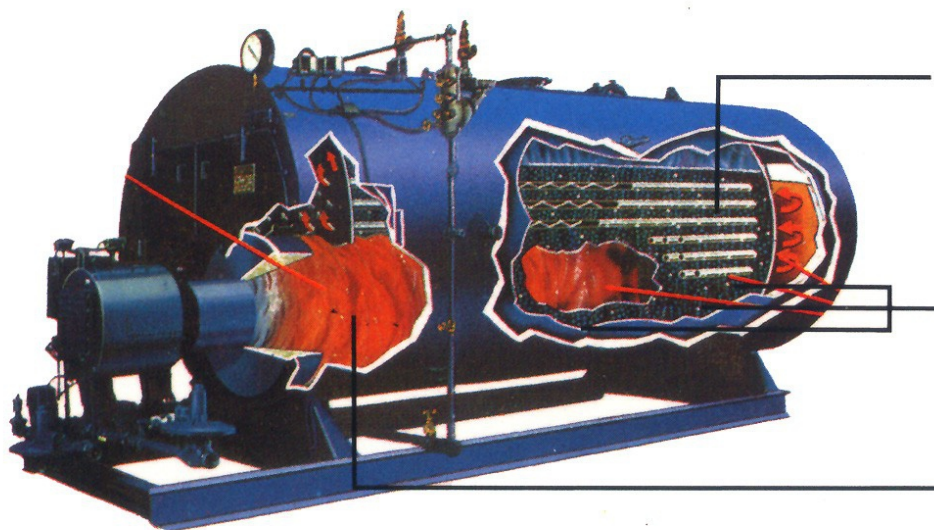

1. Fully wet-back design effectively absorbs radiant heat into the water, keeping tube ends and rear side of boiler cooler than in dry back design.
2. Three passes extract maximum usable heat from the fuel.
3. Large water-surrounded furnace assures complete combustion and heat absorption without Flame impingement.

CONSTRUCTION

Boilers are three pass wet back, horizontal, smoke tube type fusion welded. Boilers are made to IBR/DIN/BS/ASME code. Components are engineered for maximum safety, highest efficiency, dependability and quiet operation. Wet back models eliminate rear end refractory and its inherent maintenance cost, reduces stress of rear tube sheet and ligament cracking, radiant heat is eliminated, lengthening tube life and reducing heat loss from rear turnaround.


Unique design features

Fully automatic pressure jet Burner – Boiler furnace design suitable for Imported Weishaupt/ Reillo & Indian modulating burner.

Efficiency enhancement – Optional accessories such as air preheater and economizer can be Integrated with the main unit.

Automation with Programmable Logic Controllers (PLC) with Supervisory Control and Data Acquisition (SCADA) system can also be offered at an extra cost. Standard boilers are supplied with fully automatic operation with safety interlocks & alarm.

MODEL	EBPL	EBPL	EBPL	EBPL	EBPL		EBPL	EBPL	EBPL	EBPL	EBPL	EBPL	EBPL	EBPL	EBPL
	0-I	0-II	0-III	0-IV	0-V	0-VI	0-VII	0-VIII	0-IX	0-X	0-XI	0-XII	0-XIII	0-XIV	0-XV
STEAM OUTPUT TONS/HR (FROM & AT 100 ⁰ .C	0.5	0.75	1.0	1.5	2.0	2.5	3.0	3.5	4.0	5.0	6.0	8.0	10.0	12.0	14.0
OVERALL LENGTH MTRS	3.80	4.00	4.20	4.30	4.60	5.10	5.25	5.54	5.85	6.20	7.00	8.00	8.80	9.50	9.50
OVERALL WIDTH MTRS	2.20	2.20	2.35	2.45	2.55	2.70	2.75	2.77	2.93	3.12	3.20	3.30	3.60	3.90	4.00
OVERALL HEIGHT MTRS	3.00	3.10	3.20	3.37	3.50	3.67	3.75	3.80	4.00	4.10	4.20	4.35	4.50	5.00	5.20
FLUE GAS DUCT SIZE MM	225	225	250	250	300	300	300	300	400	400	475	550	650	750	800
FLUE - Furnace Oil - 9650 Kcal/Kgs. Natural Gas - 8500 Kcal/NM ³															

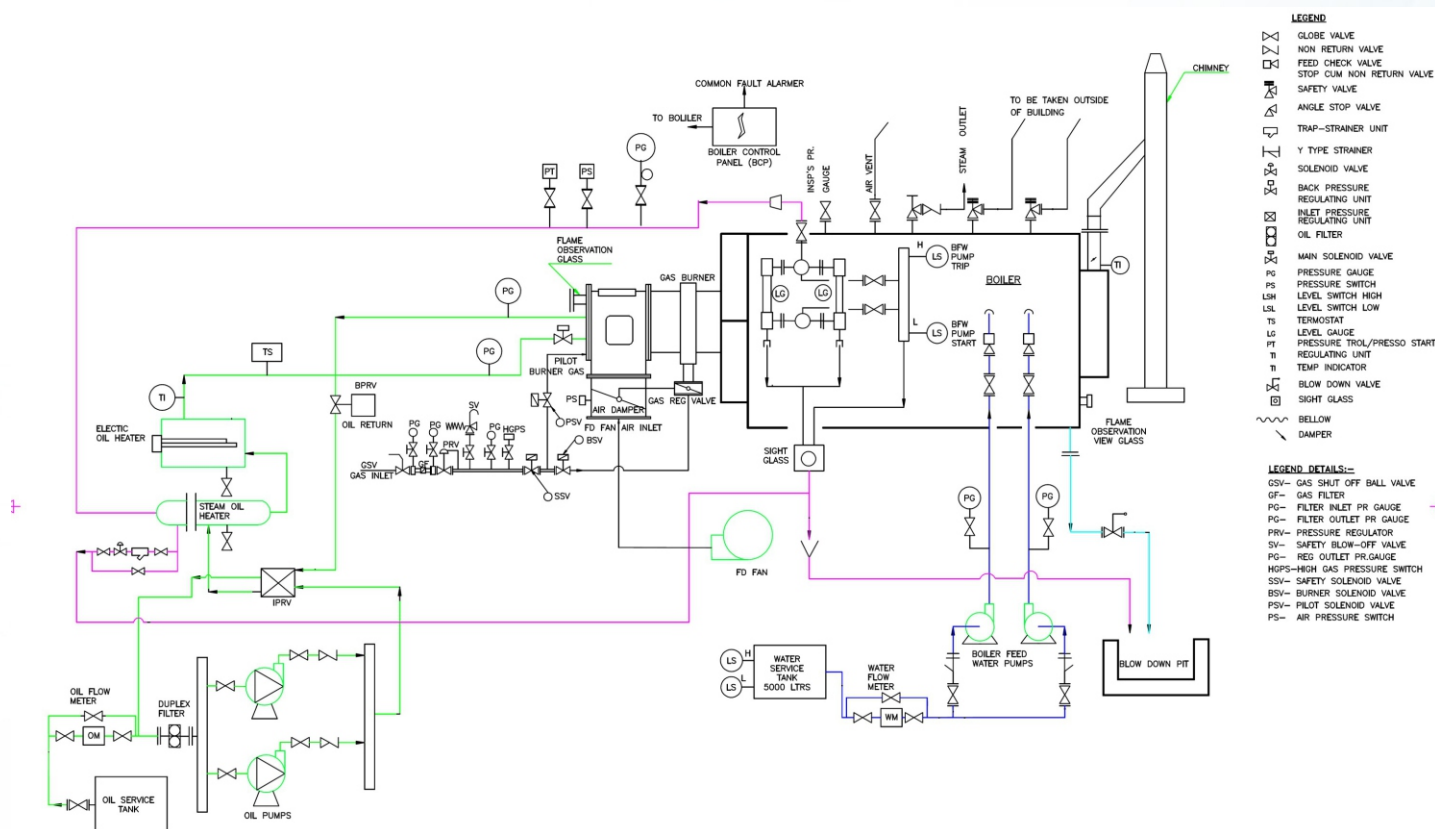

STANDARD FLOW DIAGRAM OIL/GAS FIRED BOILER

ERECTION & MAINTENANCE

Boilers are shop assembled and no special foundation is required. Each unit is a complete package ready for quick installation and connection for your service lines. For easy internal maintenance and cleaning, Manholes & Mudholes are well placed. Boiler tubes are easy to inspect as hinged front & back doors enable quick and easy Maintenance, inspection or cleaning. Spares are easily available.

PERFORMANCE

Efficiency of oil fired boiler on N.C.V. is 88% with B.S./DIN tolerance on a very wide working range and higher figures are not un-common. Steam of high purity and dryness fraction is generated as Heat Transfer surfaces in the boiler is judiciously accommodated.

CUSTOMISED INSTALLATION

Our boiler is tested before shipment including a complete check of controls. Energypack offer start-up adjustments to your fuel and steam load. Special training of operator is available.

STEAM RAISING TIME

After overnight shut down only twenty minutes are required to raise steam to maximum continuous rating From 5 Kg/cm² to 10.54 Kg/cm² (150 psig) in standard package smoke tube boilers.

OTHER PRODUCTS

IBR & NON IBR STEAM BOILERS

Self Supported Chimneys.
Hot water Boilers.
Heat Exchangers (TEMA).
Pressure Vessels (ASME).

Waste Heat Boilers.
Electrode Boilers.
Dewaxing Autoclave Boilers.
Incinerators.



D M Plant



P H Dosing System



R O Plant



Utech Projects Pvt. Ltd.

Office :
UTECH PROJECTS PVT. LTD.

9/10, Dattani 5A, Shivaji Road,
Kandivali (West), Mumbai - 400 067.
Maharashtra, India.
Mob.: +91 99207 43746

E-mail : utechprojects@gmail.com

PBS-Watertech (P) Ltd.

PBS-The power behind complete water solution...

Factory :
Plot No. 3-4, Neminath Industrial Estate III,
Navghar, Vasai (East),
Dist. Palghar - 401 210.

E-mail : sales@utechprojects.com

Website : www.utechprojects.com | www.energypack.in